

Zap Supply

Motor Control Specialists

P.O. Box 837, Spring, Texas 77383

Your Source

IBM Replacement Relays

IBM Part Number	769489	769489D	769019	769488
Zap Part Number	3354	3300	3355	3356
Contact Arrangement:	4PDT	4PDT	6PDT	12PDT
Special Features:	LED Indicator	LED Indicator, Suppression Diode	LED indicator	LED indicator
Contact Type:	Bifurcated Crossbar/Gold-clad silver			
Contact Rating (Resistive):	2A @ 30VDC, .6A @ 110VDC, .6A @ 125VAC			
Coil Voltage:	48VDC			
Coil Power Consumption:	400mw	400mw	800mw	1200mw
Service Life:	500,000 operations			


Special Features + Benefits:

Fully encapsulated contacts, ideal for caustic environments

LED indicator (lit when energized) on all models

Scan a bank of relays and see immediately what's picked and what's not picked

Surge suppression diode on model #3300

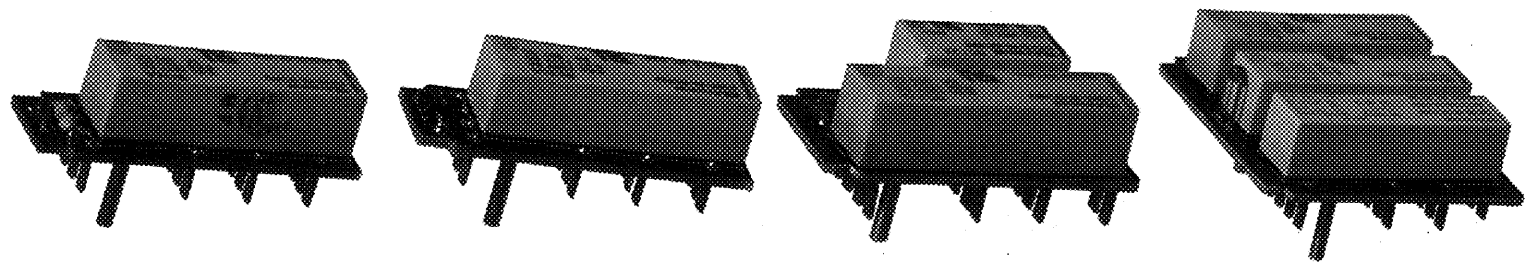

3354

3300

3355

3356

Call
TOLL FREE!!

1-800-451-8423

24 Hour FAX: (281) 292-0088